F&K Estimatings | Selected flooring source excerpts

Tile & finish schedule

Floor tile, wall tile, bases and transition strips with the material descriptions preserved.

Selected saved entries only. Not a full priced bid, original workbook, client case study or project total. Base quantities, adjusted quantities and factors retain the published source precision; they have not been recalculated or combined across units.

Read live: https://fandkestimatings.us/samples/?sample=tile-finish#quantities

Review F36 and F37 separately: the saved transition descriptions and quantities repeat. This excerpt cannot establish whether locations overlap. Confirm before ordering. The 0.1 saved factor is not a recommended rate for another project.


Recorded material / scope	Base / unit	Adjusted / unit	Factor	Source reference
FT-01 Finish Code: Ft-01 Product Type: Floor Tile Manufacturer: Daltile Product No: D10911Ms1A Color: Architect Gray Description: Strt Jnt, 1x1, Abrasive Installation Notes: Grout: Mapei 5049 Pearl Gray Flex Color Grout Sanded	39 SF	42.900000000000006 SF	0.1	'ESTIMATE '!F16 Drawing: A 2.03 Finish Schedule/A2.03
FT-02 Finish Code: Ft-02 Product Type: Floor Tile Manufacturer: Daltile Product No: Pf27Rct1224Mt, Pf231224A1Pf Color: Ocean Blue, Orange Burst Description: 12x12 Checker Board Pattern - Changing Rm Benches Installation Notes: Grout: Mapei Ultracolor Plus Pure White #5117	174 SF	191.4 SF	0.1	'ESTIMATE '!F17 Drawing: A 2.03 Finish Schedule/A2.03
FT-03 Finish Code: Ft-03 Product Type: Floor Tile Manufacturer: Daltile Product No: Vl73Rct1224Mtj1 Color: Stereo Grey Description: 12x24 - Lobby Floor Installation Notes: Grout: Mapei 5049 Pearl Gray Flex Color Grout Sanded	2735 SF	3008.5000000000005 SF	0.1	'ESTIMATE '!F18 Drawing: A 2.03 Finish Schedule/A2.03
FT-07 Finish Code: Ft-07 Product Type: Floor Tile Manufacturer: Npt Product No: Slp-37-9625 Color: Unglazed Sapphire Blue Description: 2x2 - Shower Floor, Pool Lane Stripe, Changing Rm Transom Installation Notes: Grout: Mapei Ultracolor Plus Pure White #5117	148 SF	162.80000000000001 SF	0.1	'ESTIMATE '!F19 Drawing: A 2.03 Finish Schedule/A2.03
WT-01 Finish Code: Wt-01 Product Type: Wall Tile Manufacturer: Daltile Product No: 0190412Mod1P1 Color: Arctic White Description: 4x12 - Restrooms/Changing Rooms Shower Wall Installation Notes: Grout: Mapei Ultracolor Plus Pure White #511	4944 SF	4944 SF	0	'ESTIMATE '!F22 Drawing: A 2.03 Finish Schedule/A2.03
WT-02 Finish Code: Wt-02 Product Type: Wall Tile Manufacturer: Daltile Product No: Tbd Color: Tbd Description: Shower Wall Installation Notes: Grout: Mapei Ultracolor Plus Pure White #5117	1013 SF	1013 SF	0	'ESTIMATE '!F23 Drawing: A 2.03 Finish Schedule/A2.03
WT-03 Finish Code: Wt-03 Product Type: Wall Tile Manufacturer: Daltile Product No: 117412Mod1P2 Color: Sea Breeze Description: 4x12 - Restrooms And Hallway Installation Notes: Grout: Mapei Ultracolor Plus Pure White #5117	87.5 SF	87.5 SF	0	'ESTIMATE '!F24 Drawing: A 2.03 Finish Schedule/A2.03

Recorded material / scope	Base / unit	Adjusted / unit	Factor	Source reference
WT-04 Finish Code: Wt-04 Product Type: Wall Tile Manufacturer: Daltile Product No: 1097412Mod1P2 Color: Orange Burst Description: 4x12 - Restrooms/Changing Rooms Installation Notes: Grout: Mapei Ultracolor Plus Pure White #5117	96.250000000000014 SF	96.250000000000014 SF	0	'ESTIMATE '!F25 Drawing: A 2.03 Finish Schedule/A2.03
WT-05 Finish Code: Wt-05 Product Type: Wall Tile Manufacturer: Daltile Product No: 0190412Mod1P1 Color: Arctic White Description: 4x12 Cove Base - Restrooms/Changing Rooms Installation Notes: Grout: Mapei Ultracolor Plus Pure White #5117	384 LF	422.40000000000003 LF	0.1	'ESTIMATE '!F28 Drawing: A 2.03 Finish Schedule/A2.03
WT-06 Finish Code: Wt-06 Product Type: Wall Tile Manufacturer: Tbd Product No: Tbd Color: Tbd Description: Shower Base Installation Notes: Grout: Mapei Ultracolor Plus Pure White #5117	429 LF	471.90000000000003 LF	0.1	'ESTIMATE '!F29 Drawing: A 2.03 Finish Schedule/A2.03
WT-07 Finish Code: Wt-07 Product Type: Wall Tile Manufacturer: Daltile Product No: Vl73Rct1224Mtj1 Color: Stereo Grey Description: 12x24 Cut In Half - Lobby Base Installation Notes: Grout: Mapei 5049 Pearl Gray Flex Color Grout Sanded	298 LF	327.8 LF	0.1	'ESTIMATE '!F30 Drawing: A 2.03 Finish Schedule/A2.03
Schulter Rondec Trim Brushed Stainless Steel	70.650000000000006 LF	77.715000000000018 LF	0.1	'ESTIMATE '!F33 Drawing: A 2.03 Plan Notes
Schluter Trim At Top Of Tile Wall	1150 LF	1265 LF	0.1	'ESTIMATE '!F34 Drawing: A 2.03 Plan Notes
Shculter 'Deco' Transition	193.8 LF	213.18000000000004 LF	0.1	'ESTIMATE '!F35 Drawing: A 2.03 Plan Notes
Shculter 'Reno' Transition	347.75 LF	382.52500000000003 LF	0.1	'ESTIMATE '!F36 Drawing: A 2.03 Plan Notes
Shculter 'Reno' Transition	347.75 LF	382.52500000000003 LF	0.1	'ESTIMATE '!F37 Drawing: A 2.03 Plan Notes

Tile & finish schedule | Drawing context

Finish plan detail | A2.03 | source page 1 | approved crop

Identity-sensitive title blocks are excluded. This crop provides document context; only explicit source references support sheet matches. Use the online viewer to zoom. Original source files are not included.

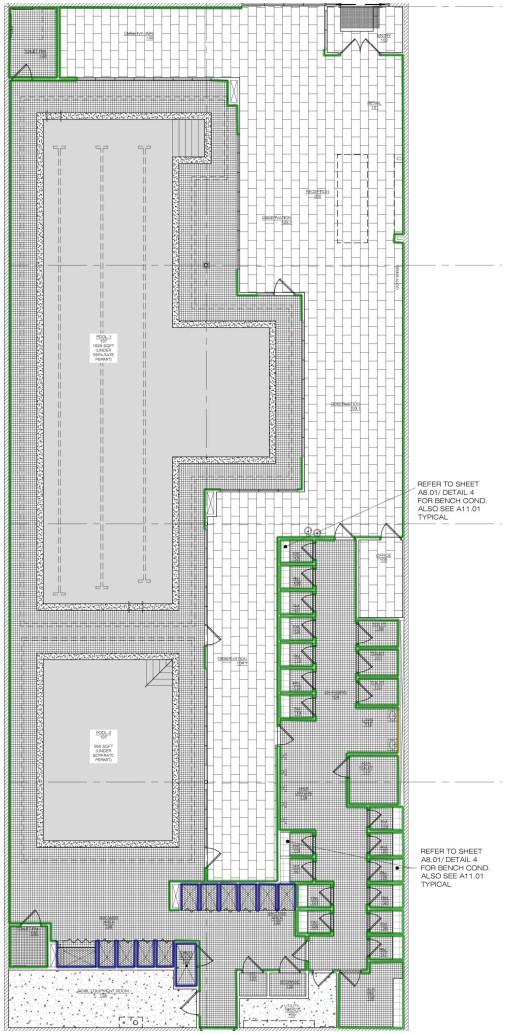

Source: owner-authorized published flooring catalog; selected row values and existing drawing crops reproduced without alteration. The original workbooks were not available for independent reconciliation during this publication.

F&K Estimatings | Selected flooring source excerpts

Renovation finish details

Porcelain flooring, wall finishes, bases and divider strips selected from the renovation schedule.

Selected saved entries only. Not a full priced bid, original workbook, client case study or project total. Base quantities, adjusted quantities and factors retain the published source precision; they have not been recalculated or combined across units.

Read live: https://fandkestimatings.us/samples/?sample=tile-renovation#quantities


The available crop is labeled A9.1H. Entries with A9.2H remain references to a different sheet, not verified matches to this crop. Descriptions stating that details are not given remain unresolved scope.

Recorded material / scope	Base / unit	Adjusted / unit	Factor	Source reference
PTF-1 Porcelain Ceramic Tile Note: Details Are Not Given	166 SF	182.60000000000002 SF	0.1	'ESTIMATE '!F40 Drawing: A 9.1H Plan Notes
Aluminum/Zinc Divider Strip Stone Threshold	3 LF	3.3000000000000003 LF	0.1	'ESTIMATE '!F43 Drawing: A 9.1H Plan Notes
CTB-1 Ceramic Tile Base Note: Details Are Not Given	22 LF	24.200000000000003 LF	0.1	'ESTIMATE '!F46 Drawing: A 9.2H Plan Notes
CTW-1 Ceramic Wall Tile Note: Details Are Not Given	160 SF	176 SF	0.1	'ESTIMATE '!F49 Drawing: A 9.2H Plan Notes
CTW-4 Ceramic Wall Tile Note: Details Are Not Given	225 SF	247.50000000000003 SF	0.1	'ESTIMATE '!F50 Drawing: A 9.2H Plan Notes
PTF-1 Porcelain Ceramic Tile Note: Details Are Not Given	150 SF	165 SF	0.1	'ESTIMATE '!F54 Drawing: A 9.1H Plan Notes
Aluminum/Zinc Divider Strip Stone Threshold	4 LF	4.4000000000000004 LF	0.1	'ESTIMATE '!F57 Drawing: A 9.1H Plan Notes
CTB-1 Ceramic Tile Base Note: Details Are Not Given	8 LF	8.8000000000000007 LF	0.1	'ESTIMATE '!F60 Drawing: A 9.2H Plan Notes
CTW-1 Ceramic Wall Tile Note: Details Are Not Given	148 SF	162.80000000000001 SF	0.1	'ESTIMATE '!F63 Drawing: A 9.2H Plan Notes
CTW-4 Ceramic Wall Tile Note: Details Are Not Given	258 SF	283.8 SF	0.1	'ESTIMATE '!F64 Drawing: A 9.2H Plan Notes

Renovation finish details | Drawing context

Renovation finish plan | A9.1H | source page 2 | approved crop

Identity-sensitive title blocks are excluded. This crop provides document context; only explicit source references support sheet matches. Use the online viewer to zoom. Original source files are not included.

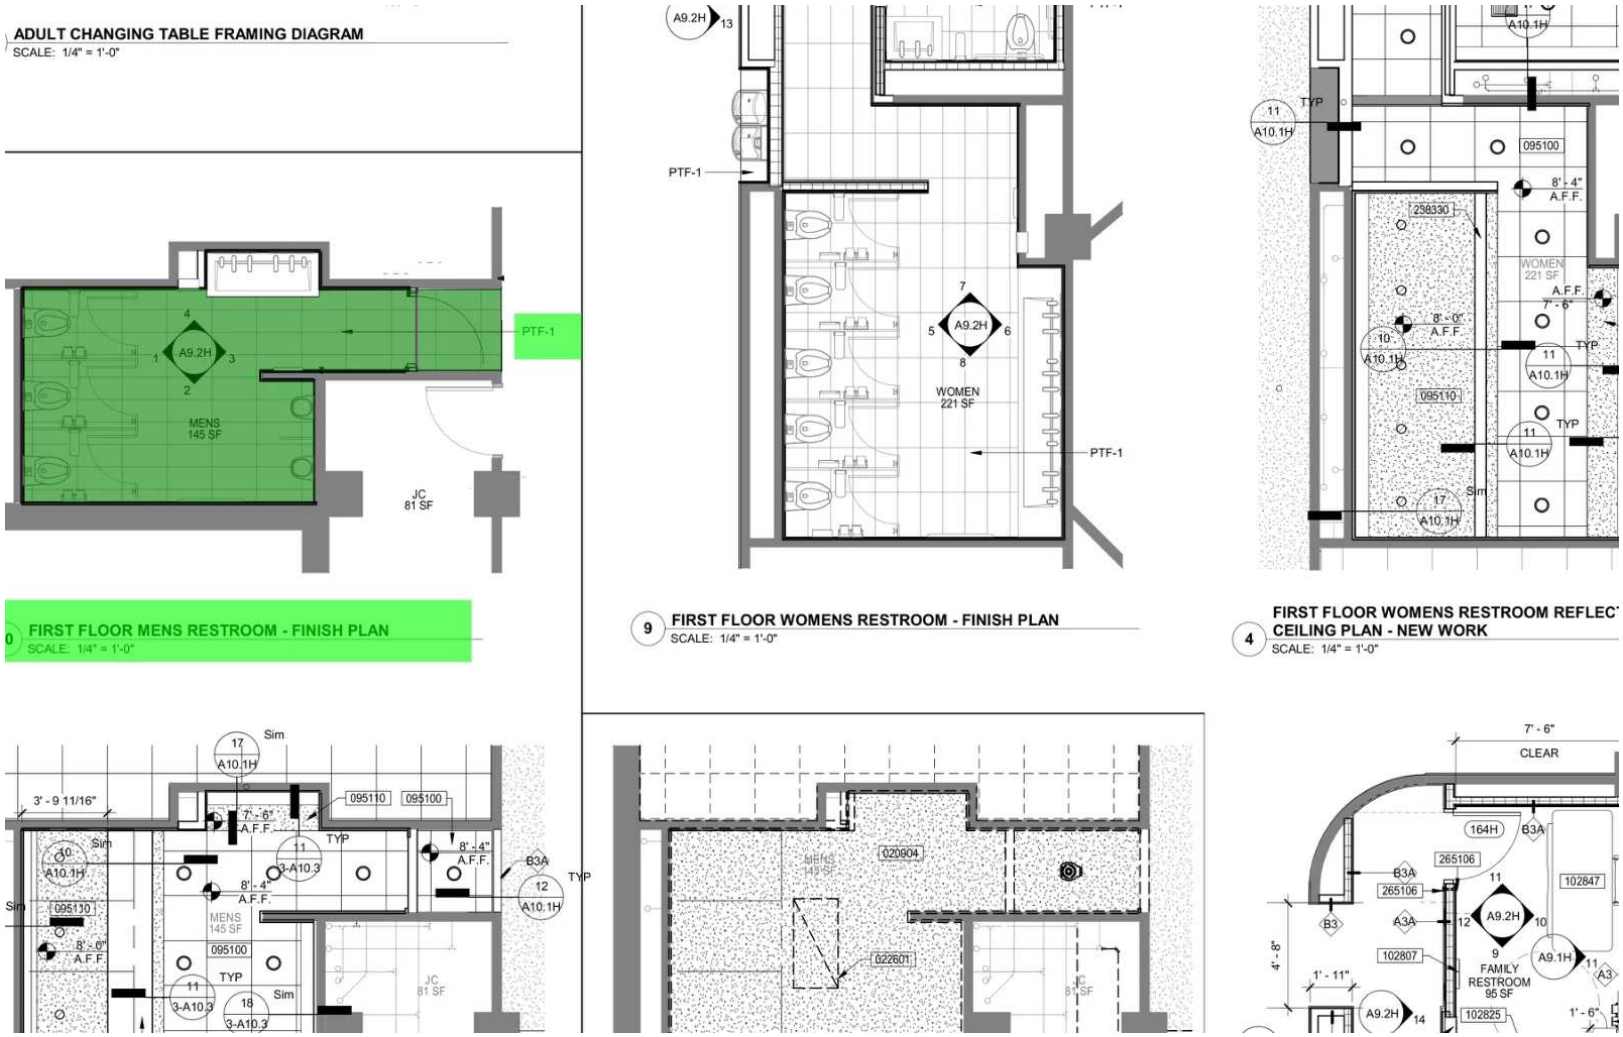

Source: owner-authorized published flooring catalog; selected row values and existing drawing crops reproduced without alteration. The original workbooks were not available for independent reconciliation during this publication.